

Asadeep
QUALITY FABRICS



RAMA

TECHNICAL INFORMATION

| Parameter | Details |
|---------------------|--|
| Composition | Polyester |
| Width | 54" |
| Abrasion | In excess of 50,000 cycles (800g / 12Kpa) Martindale |
| Fastness to Light | 5+ [BS 1006 (1990)] |
| Fastness to Rubbing | Wet: 5 Dry: 4.5 |
| Maintenance | Professional cleaning is recommended |
| Fabric GSM | 350 |
| Colour Matching | Batch to batch variations in shade may occur within commercial tolerances |

OPTIONAL TREATMENT

1.Flame Retardant Finish

BS EN1021-1 : 1994 (Cigarette)
BS 7176 : 1995 Low Hazard

2. Water Repellent

AATCC - 118

AS PER DYEING / PROCESS HOUSE DECLARATION

All Chemicals & Dyes
Eco Friendly & It Is Not Harmful For Human Health

ASADEEP FURNISHING PRIVATE LIMITED
MANGOL PURI INDUSTRIAL AREA, BA-19,
PHASE-II, NORTH WEST DELHI



+ 91-7373 9292 38



www.asadeep.com

RAMA



RAMA 37



RAMA 09



RAMA 60



RAMA 18



RAMA 30



RAMA 08



RAMA 15



RAMA 64



RAMA 29



RAMA 31



RAMA 41




RAMA 40



RAMA 67




RAMA 06

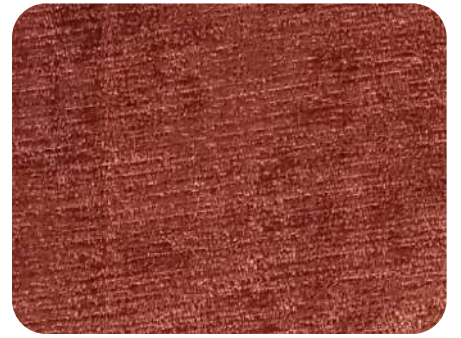

RAMA 17



RAMA 20

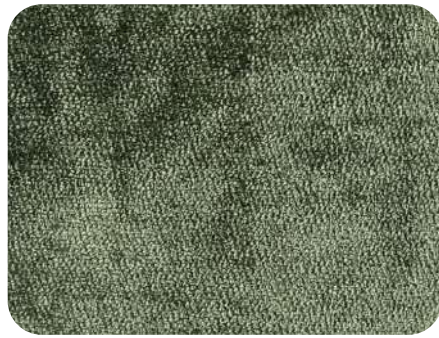

RAMA 50



RAMA 19



RAMA 61



RAMA 63



RAMA 47



RAMA 24



RAMA 10

DISCLAIMER

All fabric colours shown in this catalogue are digitally rendered for reference purposes. Due to variations in screen resolution and display settings, actual fabric colour may vary from the digital swatches or images shown.

We strongly recommend referring to the physical fabric catalogue before making any final purchasing decision.

Please Note:

- The design scale depicted may not be accurate.
- No claims will be accepted regarding color or design mismatches between the digital representation and the actual fabric.